



DESCRIPTION

Ryanfire Servowrap is a highly effective wrap specifically designed to protect structural or service penetrations through various types of fire rated walls and floors.

Servowrap is a foil faced high-temperature fibreglass matt which significantly reduces the conducting of heat through penetrating services when exposed to fire.

Servowrap will maintain the fire resistance level of walls and floors for up to 120 minutes.

CERTIFICATION

Ryanfire Servowrap has been tested and assessed in accordance with AS1530.4:2014 and AS4072.1:2005 at IANZ/NATA accredited laboratories.

APPLICATION

Ryanfire Servowrap is designed to protect steel beams and purlins, timber joists and cable trays where they pass through concrete, KOROK®, fire rated plasterboard walls and CLT, composite & concrete floors. Servowrap should be wrapped around these services on each side of the separating element.

The Servowrap is suitable to protect :

Cable trays / bundles
Steel I-beams
Steel C-purlins
Timber beams / joists




PRODUCT DIMENSIONS

Ryanfire Servowrap is 300mm wide x 15mm thick and is available in rolls of 10 metres.



Ryanfire Servowrap

Ryanfire Servowrap is used in conjunction with other Ryanfire products. Please contact the technical department for specific and more detailed "V" drawings.

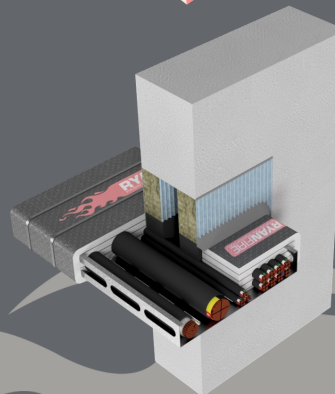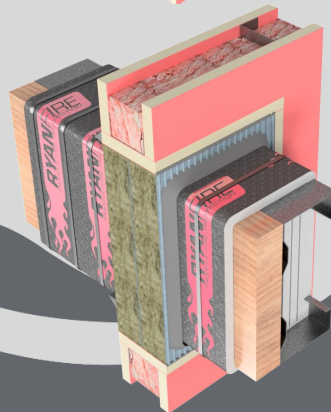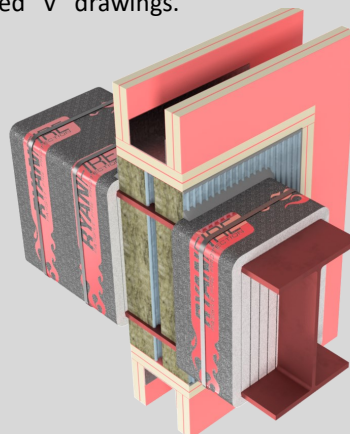

FEATURES

- *Tested to AS1530.4:2014*
- *Easy installation*
- *Retro fit capable*
- *Up to 120 mins FRR*