



### DESCRIPTION

Ryanfire Ventilated Downlight Covers are fire rated light covers/fire hoods designed to protect downlight fixtures and reinstate the performance of fire rated plasterboard ceilings when penetrated by recessed downlights.

The Downlight Covers prevent combustible materials from coming into contact with hot downlights, minimising the fire risk. They are ventilated to allow heat to disperse from the light but in the event of a fire, the intumescent material will expand to seal off the ceiling.

### CERTIFICATION

Ryanfire Ventilated Downlight covers have been assessed to AS1530.4

### APPLICATION

The Downlight Covers are simple to install and can be retro-fitted into position, providing effective performance even if the downlight is removed and replaced.


The covers can be fitted from above or below the ceiling and come in a range of sizes to fit most applications. They are flexible and lightweight and can be fitted through small apertures.

### PRODUCT DIMENSIONS

Cover Size (OD x Height)	Aperture size
150mm x 150mm	50 - 75mm
200mm x 200mm	75 - 100mm
250mm x 250mm	100 - 140mm



Ryanfire Ventilated Downlight Covers are very easy and quick to install and can provide a fire rating up to 60 min.

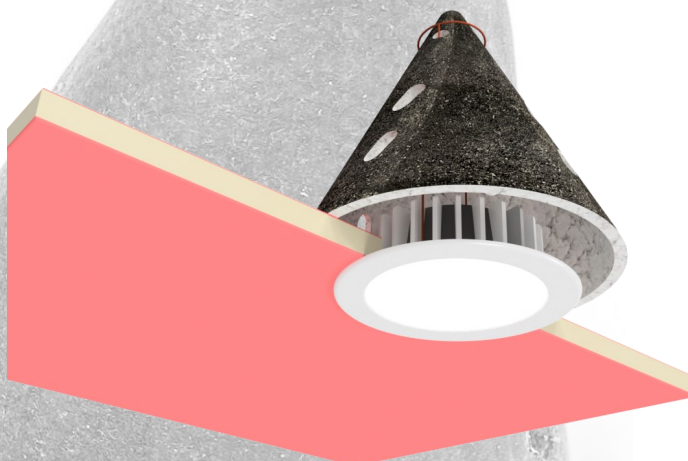

## FEATURES

- *Up to 60 minutes FRR*
- *Flexible and lightweight*
- *Very cost effective*
- *Quick, simple installation*

The information provided in this document is issued in good faith. As part of Ryanfire Products ongoing product development and testing, we reserve the right to modify product specifications without notice. Any drawings given are for illustrative purposes only. Ryanfire Products accepts no liability whatsoever for any loss, damage or injury arising from the misinterpretation or misuse of the information given. Subject to our standard terms and conditions.

For more information please contact Ryanfire  
[info@ryanfire.co.nz](mailto:info@ryanfire.co.nz) 09 443 0362

Ryanfire TDS/VDC V1.1 08/2024