

## DESCRIPTION

Ryanfire Ryansil is a fire-rated, high quality universal hybrid sealant & adhesive based on MS (modified silicone) polymer.

Ryansil does not contain any solvent or isocyanate and has a very low VOC, making it an eco-friendly sealant. It is over-paintable with water based paints and has excellent UV resistance.

Ryansil is flexible and is ideal for sealing gaps requiring high movement.

## CERTIFICATION

Ryanfire Ryansil has been tested in accordance with EN1363-1 and EN1364-4 at IANZ/NATA accredited laboratories.

## APPLICATION

Ryansil can be used for sealing construction joints in floors and walls that require movement. Ryansil may be used in vertical or horizontal seals. Ryansil may also be used in conjunction with PEF backing rod for depth control or Ryanrock as a backing.

## PRODUCT DIMENSIONS

Colour : Grey


Supplied in 600ml foil sausages (12 per carton)

## PROPERTIES

Chemical base	MS polymer
Appearance	Grey paste
Tack Free	Approx. 50min (@ 23°C & 50% R.H.)
Curing Rate	Approx. 2.5mm/24hr (@ 23°C & 50% R.H.)
Application Temperature	+5°C and +40°C
Elongation at Break % (ISO 37)	≥ 120%
Storage	+10°C and +25°C, moisture free



Ryanfire Ryansil

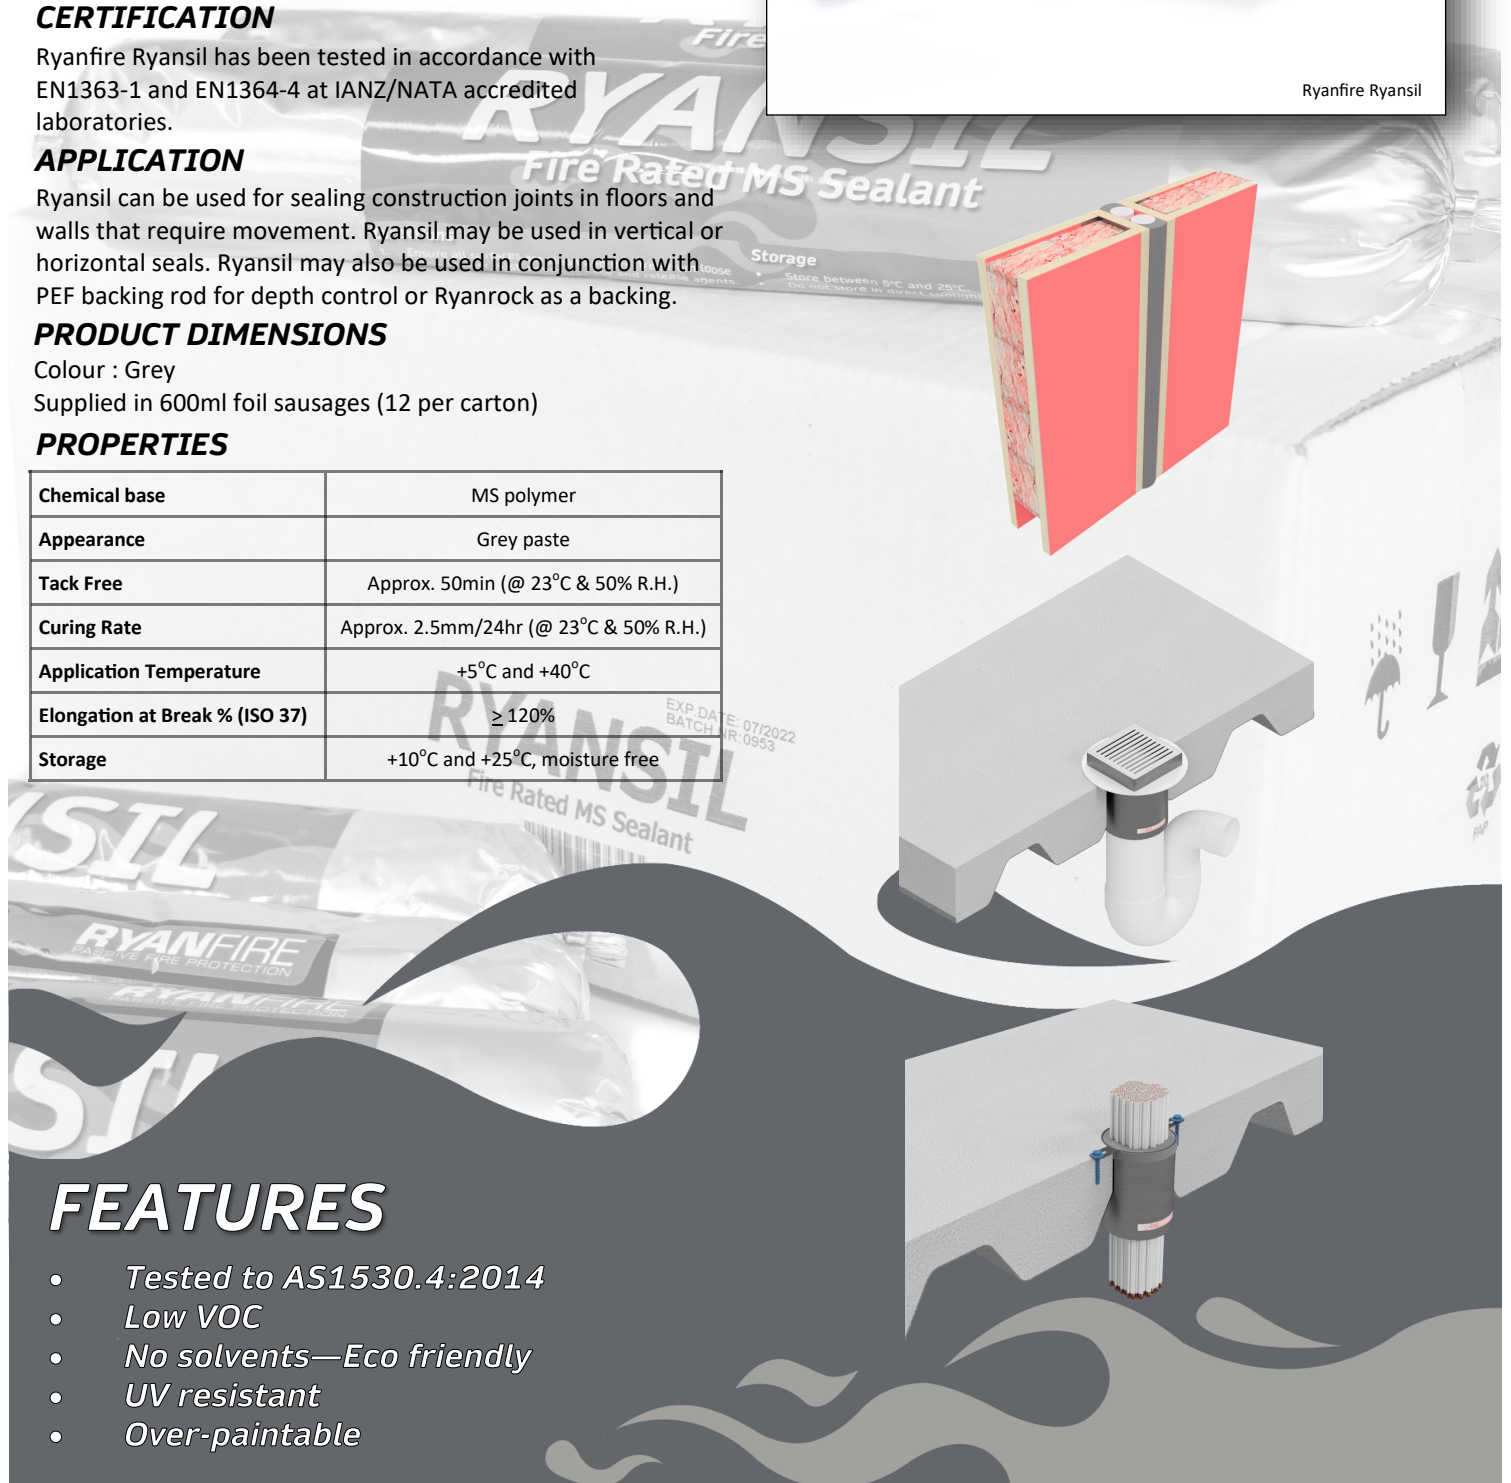

## FEATURES

- Tested to AS1530.4:2014
- Low VOC
- No solvents—Eco friendly
- UV resistant
- Over-paintable

The information provided in this document is issued in good faith. As part of Ryanfire Products ongoing product development and testing, we reserve the right to modify product specifications without notice. Any drawings given are for illustrative purposes only. Ryanfire Products accepts no liability whatsoever for any loss, damage or injury arising from the misinterpretation or misuse of the information given. Subject to our standard terms and conditions.

For more information please contact Ryanfire  
info@ryanfire.co.nz 09 443 0362

Ryanfire TDS/RSIL V1.3 08/2024