



DESCRIPTION

Ryanfire CB60F is a highly flexible, shower resistant, and fire rated fabric barrier used in horizontal seismic linear gaps in floors. CB60F is ideal for linear seals that require high degree of movement and may be used for gaps up to 350mm wide.

CB60F has a hydrophobic surface and is water resistant making it suitable for temporary exposure to light rain showers during construction.

Ryanfire CB60F will provide up to 60 minutes of fire protection in concrete floors.

CERTIFICATION

Ryanfire CB60F has been tested and in accordance with AS1530.4:2014 at IANZ/NATA accredited laboratories.

APPLICATION

CB60F is installed within large seismic linear gaps in concrete floors. Cut the CB60F to size according to the movement required. The CB60F is secured into place with 25mm wide stainless steel flat bar.

For joints, overlap the 2 pieces by 100mm and stitch together using stainless steel thread, 25mm from each edge.

Ryanfire Ryansil may be used to provide an additional water resistant seal along the edges.

PRODUCT DIMENSIONS


CB60F is available in rolls of 400mm x 10m and 600mm x 10m

Colour: Grey



Ryanfire CB60F

Please contact the technical department for specific and more detailed "V" drawings.

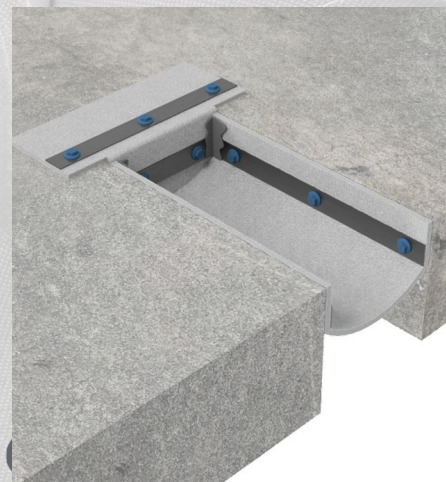

FEATURES

- *Tested to AS1530.4:2014*
- *Easy installation*
- *Shower resistant seismic seal*
- *Up to 60mins FRR*

The information provided in this document is issued in good faith. As part of Ryanfire Products ongoing product development and testing, we reserve the right to modify product specifications without notice. Any drawings given are for illustrative purposes only. Ryanfire Products accepts no liability whatsoever for any loss, damage or injury arising from the misinterpretation or misuse of the information given. Subject to our standard terms and conditions.

For more information please contact Ryanfire
info@ryanfire.co.nz 09 443 0362

Ryanfire TDS/CB60F V2.3 08/2024