RYANFIRE PUTTY CORD



DESCRIPTION

Ryanfire Putty Cord is a non-setting, malleable putty designed to easily fit around service penetrations. Ryanfire Putty Cord will reinstate the fire rating in the separating element when installed around service penetrations, and will create an ablative barrier preventing the passage of smoke, hot gasses and flame.

The putty cord is an excellent option to seal cables and cable bundles where there are small annular gaps and tight access.

CERTIFICATION

Ryanfire Putty Cord has been tested and assessed in accordance with AS1530.4:2014 and AS4072.1:2005 at IANZ accredited laboratories.

APPLICATION

Ryanfire Putty Cord is designed to protect cables and cable bundles where they pass through concrete, masonry and fire rated plasterboard walls.

Ensure that the surfaces are clean, dry and free from dust. Wrap the putty cord around the services and it to create a 15mm cone ensuring the annular gaps are filled and good contact is made all around the penetration.


Ryanfire Putty Cord must be installed on both sides of the wall.

PRODUCT PROPERTIES

Colour	Red
Packaging	5 x 200mm x Ø15mm cords per box, 1 meter total
Storage temperature	Between 5°C and 30°C
Density	1.55 g/ml
Application temperature	+4°C - +40°C Te
TVOC	12 μg/m³



Ryanfire Putty Cord is a great option around cables and small cable bundles. Please contact the technical department for specific and more detailed "V" drawings.

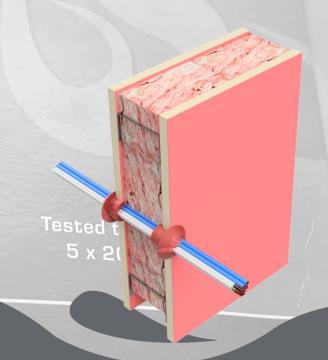

FEATURES

- Simple, quick installation
- No tools required
- No solvents or VOC's
- Moisture resistant

misuse of the information given

Up to 120mins FRR

The information provided in this document is issued in good faith. As part of Ryanfire Products Ltd ongoing product development and testing, we reserve the right to modify product specification without notice. Any drawings given are for illustrative purposes only. Ryanfire Products Ltd accepts no liability whatsoever for any loss, damage or injury arising from the misinterpretation or