

## DESCRIPTION

Ryanspan is a very pliable laminated strip consisting of multiple layers of intumescent graphite sandwiched between layers of foam.

Ryanspan provides a high level of movement and is suitable for gaps up to 150mm and provides up to 2 hours fire protection. It is a quick and easy solution to install with minimal mess and clean-up.

Ryanspan Pro can be used for slab edge protection in combustible floors, and can be installed prior to any cladding put in place.

## CERTIFICATION

Ryanspan has been tested at IANZ/NATA accredited laboratories, in accordance with the following standards:

Fire	AS1530.4:2014, AS4072.1:2005
Acoustic	ISO 10140-2
Environmental	ASTM-B117:2011

## APPLICATION

Ryanspan is suitable for use within construction joints and voids that require a high degree of flexible movement and fire resistance. Ryanspan can be installed both vertically and horizontally.

## PRODUCT DIMENSIONS

Ryanspan is available in the following sizes :




25mm x 25mm x 1m  
50mm x 50mm x 1m  
75mm x 50mm x 1m  
100mm x 100mm x 1m  
150mm x 100mm x 1m

60mm x 100mm x 1m (Ryanspan Pro)

Colour : Black



Ryanspan is used to provide a soft seal to movement joints. Please contact the technical department for specific and more detailed "V" drawings.

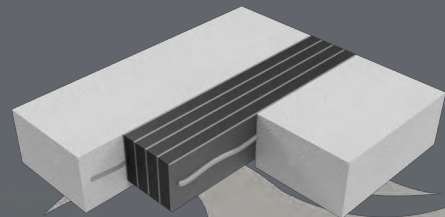

## FEATURES

- Tested to AS1530.4:2014
- Min 50% compression & recovery
- Vertical/horizontal applications
- Easy to install
- Up to 120mins FRR

The information provided in this document is issued in good faith. As part of Ryanfire Products Ltd ongoing product development and testing, we reserve the right to modify product specifications without notice. Any drawings given are for illustrative purposes only. Ryanfire Products Ltd accepts no liability whatsoever for any loss, damage or injury arising from the misinterpretation or misuse of the information given



For more information please contact Ryanfire  
info@ryanfire.co.nz 09 443 0362