


INSTALLATION INSTRUCTIONS

1. ENSURE THE APERTURE IS CLEAN AND FREE OF DEBRIS. REMOVE DUST FROM SURFACES REQUIRING INSTALLATION.
2. CUT 100MM THICK 60KG/M3 DENSITY ROCKWOOL TO COMPRESS TIGHTLY INSIDE THE ANNULAR GAP BETWEEN THE PIPE AND OPENING.
3. POSITION THE ROCKWOOL TO FORM A MINIMUM 3MM RECESS FROM THE TOP OF THE FLOOR SLAB.
4. APPLY INTUMASTIC TO THE RECESS TO A MINIMUM DEPTH OF 3MM.

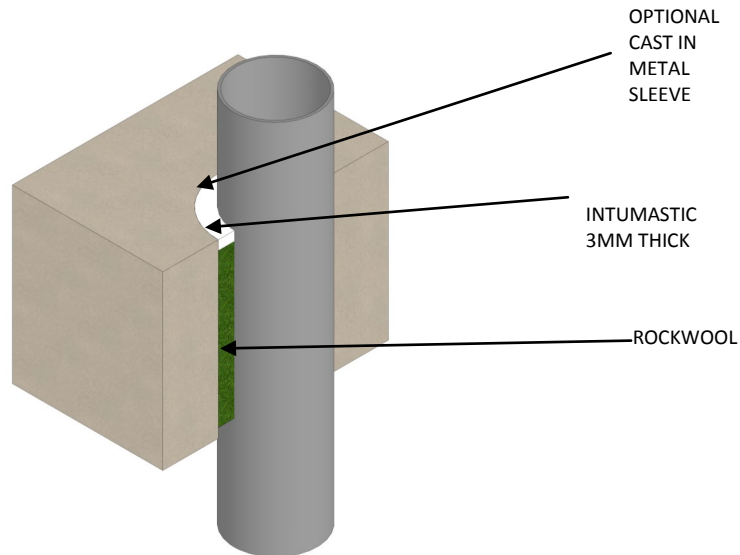

Notes

Products: INTUMASTIC, ROCKWOOL
Approval: AS 1530.4/AS 4072.1
BK: 1
Ref: 35084000
ID: 3
Scenario: Penetration seal to steel pipe.
Void: 0 - 50mm annular.
Construction: 150mm concrete floor slab.
Fire Integrity: 120 minutes.
Insulation: 90 minutes .
Services: Up to 49mm dia. steel pipe.

Web based drawings are for example only. Fire performance of any system is dependant on, but not limited to, size of opening, substrate, if penetrations are passing through, type, size and number. Please refer to Ryanfire technical department for detailed and specific fire performance information.



Client

Job Title

Drawing Title

Steel Pipe Penetration in Floor Slab

Scale	Date	
NTS	June 2019	
Sheet Size	Drawn By	
A3		
Drawing Number	Rev	
V3		2.0

Please note:
Ryanfire Products Ltd owns and has copyright in these drawings. They are to be used only for the purpose for which they were intended and supplied and are not to be sold, transferred or made available for use by a third party.

Any misuse of these drawings will result in legal proceedings.

All errors and omissions excepted - the Information contained within this drawing is believed to be correct on the date of publication, and is based upon tested and certified solutions. The policy of RyanFire Products Ltd is one of constant improvement. Installers must therefore ensure that they are following the latest published drawings, test evidence and instructions. Whilst RyanFire Products Ltd will endeavour to keep its publications up to date, the accuracy of the information contained within this drawing may be affected by pertinent changes in the law or regulatory requirements and alterations or amendments to the specification of the manufactured products. Terms and conditions of sale apply.

RYANFIRE Technical Support: info@ryanfire.co.nz - Tel 09 443 0362