
## **INSTALLATION INSTRUCTIONS**

- 1. ENSURE THE APERTURE IS CLEAN AND FREE OF DUST AND DEBRIS.
- 2. APPLY RYANFIRE MASTIC INTO THE ANNULAR GAP BETWEEN THE SERVICE BUNDLE AND THE PLASTERBOARD WALL.
- 3. POSITION THE FS COLLAR AROUND THE HVAC BUNDLE AND SLIDE IT UP TO THE SURFACE OF THE WALL
- 4. FIX THE COLLAR TO THE WALL WITH 8G X 50MM PLASTERBOARD SCREWS. ENSURE ALL FIXING POINTS ARE USED.
- 5. APPLY RYANFIRE HP-X INTO THE ANNULAR GAP BETWEEN THE HVAC BUNDLE AND THE COLLAR TO THE FULL DEPTH OF THE COLLAR.
- 6. REPEAT THIS PROCESS ON THE OPPOSITE SIDE OF THE WALL.
- 7. REMOVE ANY EXCESS SEALANT WITH A DAMP CLOTH.

amendments to the specification of the manufactured products. Terms and conditions of sale apply.

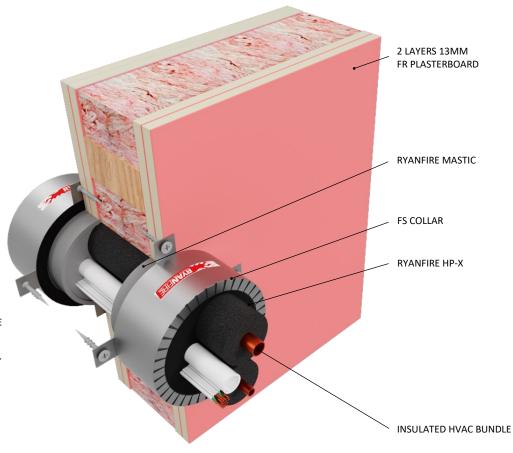

**Products:** RYANFIRE FS COLLAR

RYANFIRE HP-X

RYANFIRE MASTIC

Approvals: AS 1530.4:2014/AS 4072.1:2005

BK: 253

Ref: 22SFR00083

ID:

Scenario: Penetration seal to fire rated HVAC

bundle (heat pump services)

Services: Up to 1 set nitrile rubber insulated

pair coil copper pipes

5 TPS cables Ø20mm PVC pipe

Construction: 142mm FR plasterboard /

Masonry Wall

Aperture: Max Ø116mm

Annular: 10 - 25mm

Fire Integrity: 120 minutes Fire Insulation: 60 minutes

Web based drawings are for example only. Fire performance of any system is dependant on, but not limited to size of opening, substrate, if penetrations are passing through, type, size and number. Please refer to Ryanfire technical department for detailed and specific fire performance information.



**RYANFIRE Technical Support:** info@ryanfire.co.nz - Tel 09 443 0362

FS Collar & HP-X to fire rated HVAC bundle 142mm plasterboard wall

Scale Date May 2025

the latest published drawings, test evidence and instructions. Whilst Ryanfire Products will endeavour to keep its publications up to date, the accuracy of the information contained within this drawing may be affected by pertinent changes in the law or regulatory requirements and alterations or Drawing Number

NTS

1.0

V14.25

Ryanfire Products owns and has copyright to these drawings. They are to be used only for the purpose for which they were intended and supplied and are not to be sold, transferred or made available for use by a third party. Any misuse of these drawings will result in legal proceedings.

All errors and omissions excepted. The information contained within this drawing is believed to be correct on the date of publication, and is based upon tested and certified solutions. The policy of Ryanfire Products is one of constant improvement. Installers must ensure that they are following